


# SC Fiber Optic Connector Fast Connector

## Application:

1. Telecommunication Network
2. LAN, wan, data and video transmission.
3. FTTH & FTTx
4. Optical fiber access of mobile base station.

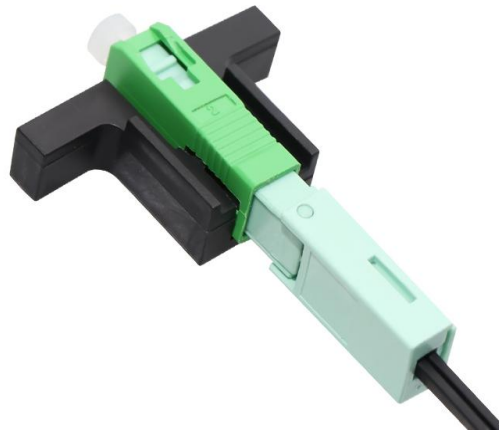

## Features:

1. Based on the pluggable non-preset tube technology
2. Precision ceramic components with co-axial self centering, Excellent and durable optical property
3. Optical fiber fits axially in elastic way and avoids completely any false connect
4. Triple clamping through the naked fiber, tight buffer and cable, etc., can be used as patchcord
5. Lower requirement for the habit working and work environment call for to the builder.
6. High on-line tensile strength of Optical Fast Connector after terminating, always keep connecting under the force from cabling and drawing.
7. Integrated protection of the casing to withstand harsh user environment.
8. High success rate and easiness in installation with average splicing time 100 sec

## Parameter:

Item NO.	Description	Unit	Standard
1	Insertion Loss(dB)	dB	$\leq 0.3$ dB
2	Return Loss(dB)	dB	UPC $\geq 45$ dB, APC $\geq 50$ dB
3	Lenght	MM	50
4	Fiber Type	/	SM
5	Connector Type	/	SC
6	Fiber Cable Type	/	3.1*2.0mm butterfly optical cable

## Packing:

- 10 pcs in blister box
- 3000 pcs in carton
- Carton size:47\*47\*35cm