


LC UNIBOOT CONNECTOR-HD

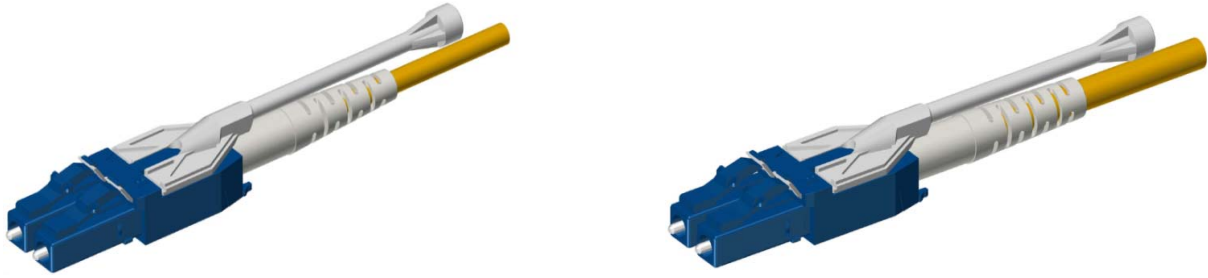

Application:

- 1. Telecommunication Network
- 3. Data Center Cabling
- 4. Testing
- 5. Optic Networks

Features:

- 1. The connector is designed to meet the requirements of IEC 61754-20
- 2. Meet the test requirements of GR326-Core
- 3. Made of RoHS & REACH Material and UL94-V0 rated type

Description:

LC UNIBOOT-HD Connector that can realize polarity change, the pull & push tab design effectively saves the wiring space.

Parameter:

Connector	Ferrule Type	Housing	Boot Type	Boot Color
LC UNIBOOT-HD 2.0	SM:125.5μm	SM:Blue	2.0mm	White
LC UNIBOOT-HD 3.0	MM:127μm	SM:Green	3.0mm	Blue
LC UNIBOOT-HD 4.0	SM:125μm	MM:Beige		Red
	MM:144μm	MM OM3:Aqua		Black
		MM OM4:Heather Violet		Yellow
		MM OM5:Lemon Yellow		Green