


MPO ADAPTOR Specification

1、Appearance

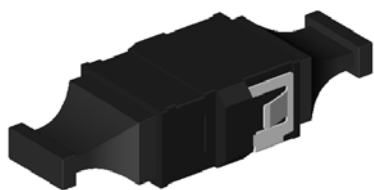

| Type. | Color |
|-------------|-------|
| Regular key | Black |
| Aligned Key | Black |

2、Feature

2.1 Insertion loss

| Specification value | |
|---------------------|--|
| IL | $\leq 0.35\text{dB}$ |
| Repeatability | 200 times |
| Temperature | $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$ |

2.2 Part material

| Part | Material | Quantity |
|------------------|----------|----------|
| MPO-ADA Dust Cap | PBT | 2 |
| Housing | PBT | 1 |
| Clip | SUS | 1 |

3、 Requirement


3.1 Meet IEC_61754-7

3.2 Meet GR-326 & GR-1435core

3.3 Flame Rating: UL94-V0

3.4 ROHS compliance: RoHS2.0 & REACH

4、 Size

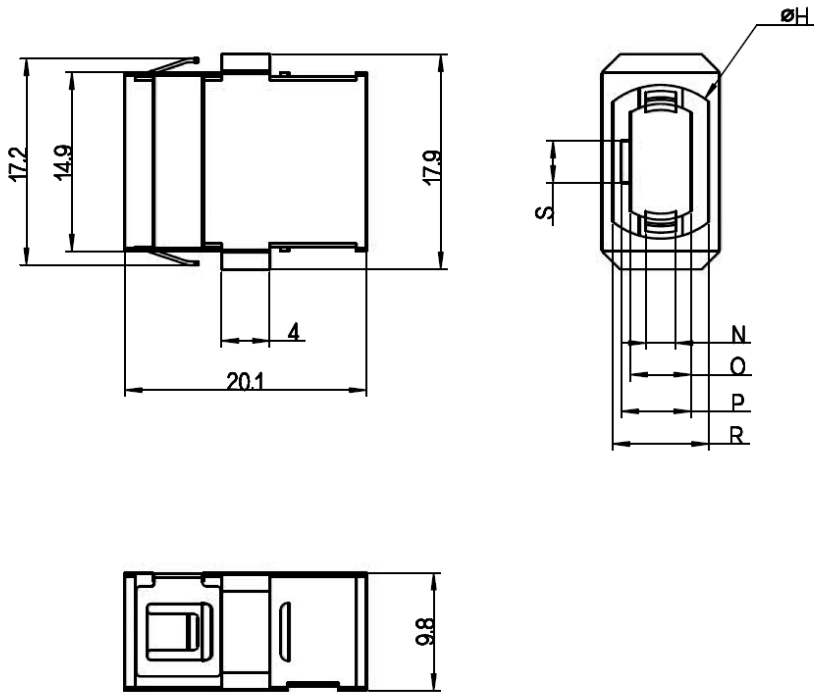

| Ref. | Dimensional tolerance | |
|------|-----------------------|------|
| | Min | Max |
| S | 3.4 | 3.6 |
| N | 2.4 | 2.6 |
| O | 5.0 | 5.1 |
| P | 5.7 | 5.9 |
| R | 7.8 | 8.2 |
| H | 12.6 | 13.0 |

5、 Packing

Inner packing: 50pcs/Package

Outer packing: 2500pcs/Carton

Carton Size: 45cm*31cm*23cm