

Multipart service Terminal Box



Product model	1x4 Multiport service terminal box	1x6 Multiport service terminal box	1x8 Multiport service terminal box	1x12 Multiport service terminal box
Dimension(mm*mm*mm)	210*105*110	260*105*110	280*105*110	370*140*130
N.W(g)	500	600	750	1700
Fiber cores	4	6	8	12
Max fibers	8	12	16	24
Protection grade	IP68	IP68	IP68	IP68
Installation method	Wall-mounted Pole-mounted	Wall-mounted Pole-mounted	Wall-mounted Pole-mounted	Wall-mounted Pole-mounted
Carton size(cm*cm*cm)	23*12*13	28*12*13	30*12*13	40*16*15
G.W (kg/ctn)	1	1	1	2
Qty (pcs/ctn)	1	1	1	1

Per-connectorize Drop Cable



Product model	Waterproof patch cord /pigtail	Waterproof patch cord /pigtail	Waterproof patch cord /pigtail	Waterproof patch cord /pigtail	Waterproof patch cord /pigtail	Waterproof patch cord /pigtail	Waterproof patch cord /pigtail
Connector type	Huawei mini	Huawei mini	Huawei mini	Corning	Corning	Corning	Huawei Corning
Built-in connector type	SC	DLC	MPO	SC	DLC	MPO	SCfast connector
Cable spec	5.0mm round cable /drop cable	5.0mm round cable /drop cable	5.0mm round cable /drop cable	5.0mm round cable /drop cable /flat cable	5.0mm round cable /drop cable /flat cable	5.0mm round cable /drop cable /flat cable	drop cable
Length(m)	Customized	Customized	Customized	Customized	Customized	Customized	Customized
Protection grade	IP68	IP68	IP68	IP68	IP68	IP68	IP68
carton size(cm*cm*cm)	35*35*20	35*35*20	35*35*20	35*35*20	35*35*20	35*35*20	35*35*20
G.W(Kg/ctn)	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Qty (pcs/ctn)	24	24	24	24	24	24	24




www.jiaweice.com

ZHEJIANG JIAWEI
COMMUNICATION EQUIPMENTS CO.,LTD.

Add.: No.8, Rixing Road, East District, Guanhaiwei Industrial Park,
Cixi, Zhejiang, China 315315

Tel.: +86 574 63665333
Fax: +86 574 63650783
E-mail: sales@jiaweice.com

JIAWEI 嘉威

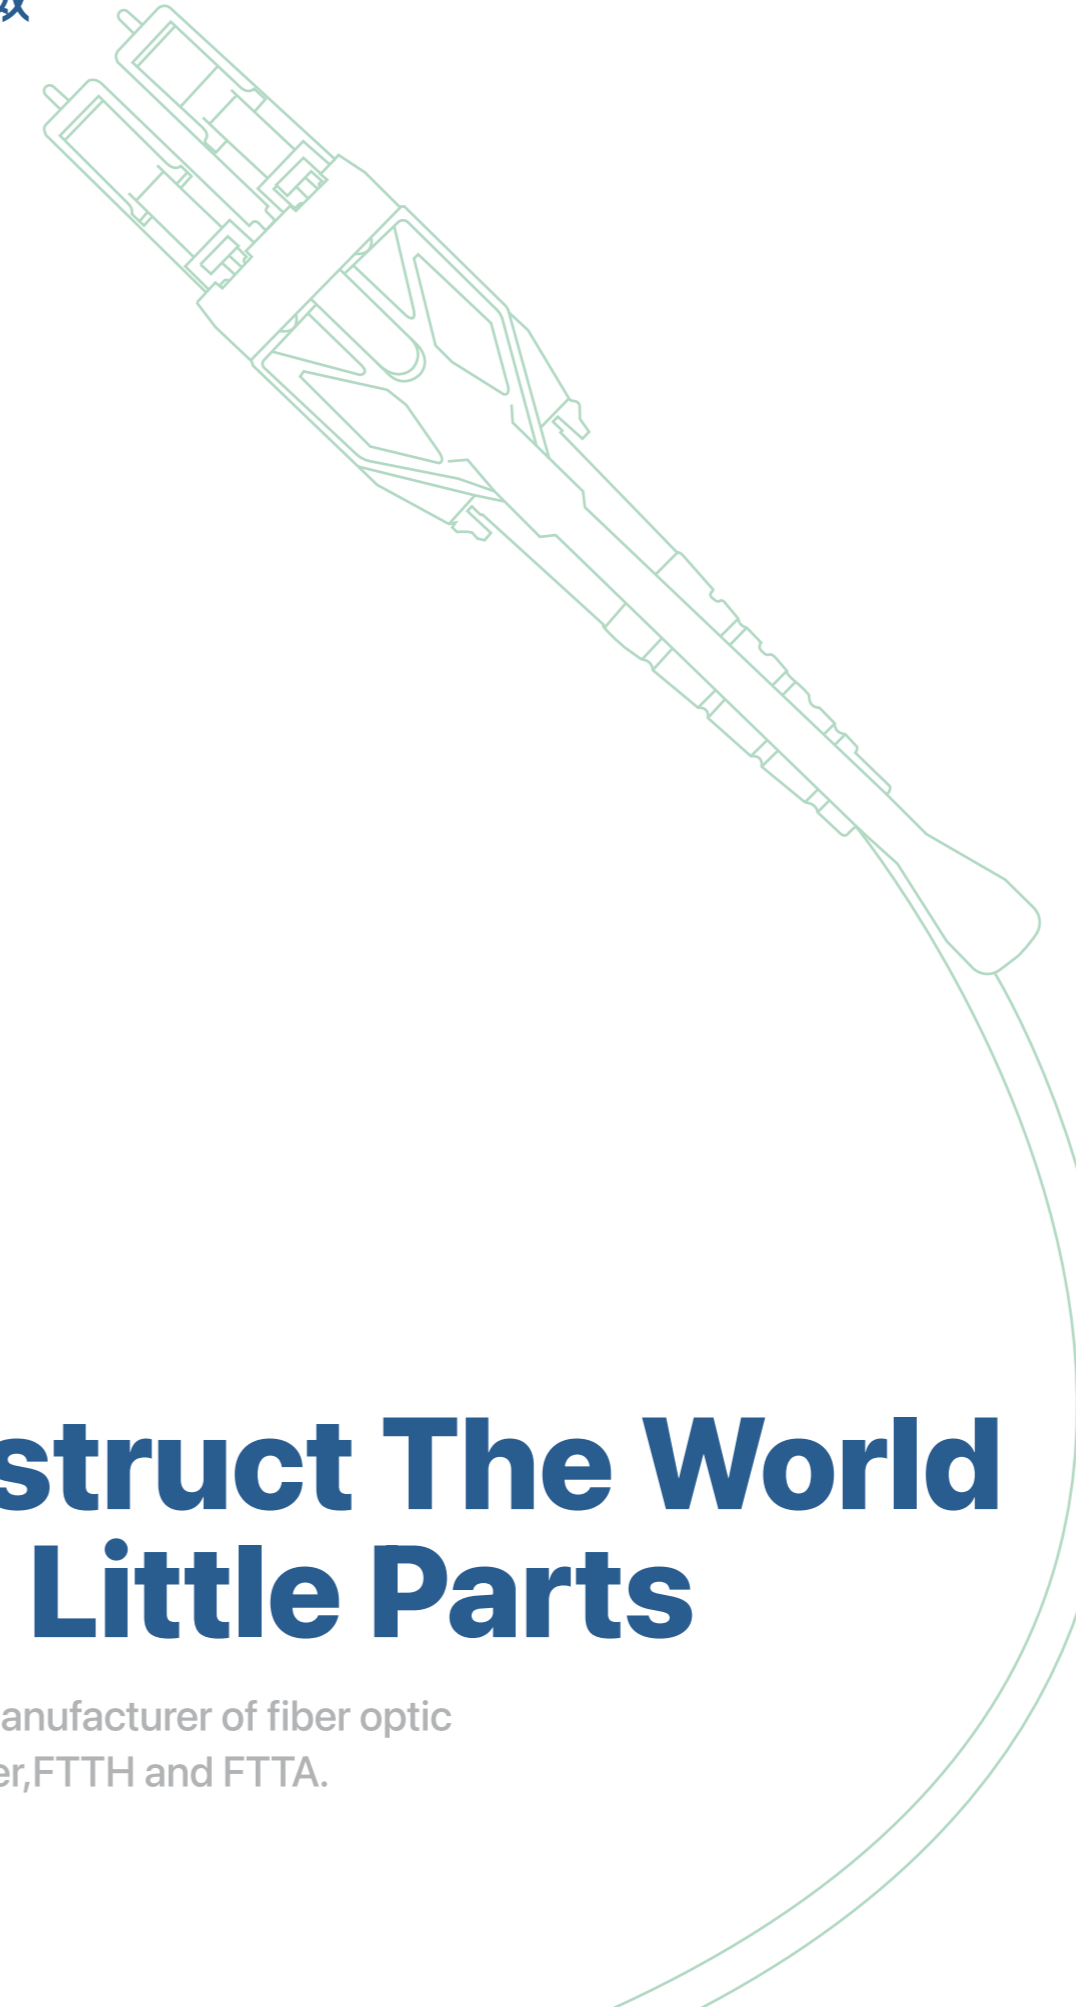

Focus on design, development and sales of optical fiber passive components

JIAWEI started the development and sales of optical fiber passive devices in 2008. Due to our mold development and production capabilities, the ODN product line was expanded in 2020, the main products are pre-connected optical cables and boxes.

- Reasonable and innovative product design
- Excellent Engineering Technology
- High Quality Manufacturing Conditions
- Honest And Reliable Service

Construct The World with Little Parts

Professional manufacturer of fiber optic for DATA Center, FTTH and FTTA.

Fiber Optical Terminal Box



Product model	1x8 fiber distribution box
Dimension(mm*mm*mm)	235*125*50
N.W(g)	452
Fiber cores	8
Max fibers	8
Protection grade	IP65
Installation method	Wall-mounted
Carton size(cm*cm*cm)	56.5*25*32
G.W (kg/ctn)	10
Qty (pcs/ctn)	20

Fiber Optical Distribution Box



Product model	1x16 fiber distribution box
Dimension(mm*mm*mm)	420*240*130
N.W(g)	4500
Fiber cores	8
Max fibers	96
Protection grade	IP68
Installation method	Wall-mounted/Pole-mounted
Carton size(cm*cm*cm)	52.5*43*34.5
G.W (kg/ctn)	20
Qty (pcs/ctn)	4

FAT Box



Product model	1x8 fiber distribution box
Dimension(mm*mm*mm)	240*210*130
N.W(g)	1050
Reinforced Adapter	10
Max Capacity	1:8 / 1:9
Protection grade	IP65
Installation method	Wall-mounted
Carton size(cm*cm*cm)	43*28.5*55
G.W (kg/ctn)	13
Qty (pcs/ctn)	40

Fiber Optical Distribution Box



Product model	1x8 fiber distribution box
Dimension(mm*mm*mm)	330*165*117
N.W(g)	2300
Reinforced Adapter	8
Max Capacity	96
Protection grade	IP68
Installation method	Wall/Pole / Aerial-mounted
Carton size(cm*cm*cm)	39.2*27.7*17.3
G.W (kg/ctn)	3
Qty (pcs/ctn)	1

Fiber Optical Distribution Box



Product model	1x8 fiber distribution box
Dimension(mm*mm*mm)	295*185*110
N.W(g)	1000
Fiber cores	8
Max fibers	8
Protection grade	IP65
Installation method	Wall-mounted
Carton size(cm*cm*cm)	62*32*40
G.W (kg/ctn)	11
Qty (pcs/ctn)	10

Fiber Optical Terminal Box



Product model	1x8 fiber distribution box
Dimension(mm*mm*mm)	190*130*50
N.W(g)	230
Fiber cores	8
Max fibers	16
Protection grade	IP65
Installation method	Wall-mounted
Carton size(cm*cm*cm)	43*28.5*55
G.W (kg/ctn)	13
Qty (pcs/ctn)	40

Fiber Optical Splice Closure(Dome Type)



Product model	fiber optic splice closure
Dimension (mm)	φ215*430
N.W(g)	2000
Fiber cores	144
Max fibers	6*24F
Protection grade	IP68
Installation method	Wall/Pole/Aerial-mounted
Carton size(cm*cm*cm)	82*45*42
G.W (kg/ctn)	16
Qty (pcs/ctn)	8

Fiber Optical Distribution Box



Product model	1x8 fiber distribution box
Dimension (mm*mm*mm)	260*208*92
N.W(g)	1500
Reinforced Adapter	8
Max fibers	96
Protection grade	IP68
Installation method	Wall/Pole/Aerial-mounted
Carton size(cm*cm*cm)	38.6*26*18
G.W (kg/ctn)	2.2
Qty (pcs/ctn)	1